

5" - 14 gauge spun aluminum ball
gold anodized

Single sheave truck, cast aluminum
revolving, non-fouling type

2 Bronze swivel snaps with covers
per halyard

1 Set of halyard: #10 poly

Model EH!3051252

THE FLAGPOLE
COMPANY®

The Flagpole Professionals!



1 - 9" Cast aluminum cleat

Aluminum flash collar

3000 PSI concrete

Hardwood wedges
(supplied by others)

Dry sand tightly tamped
after aligning pole


Foundation sleeve -16 ga
hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate

1/4" Steel support plate
welded to grounding spike

Exposed height: 30'-0"
Tapered portion: 17'-3"
Overall length: 33'-0"
Cleat height: 5'-0"
Foundation: 3'-6"
Straight portion: 15'-9"
6"
12"

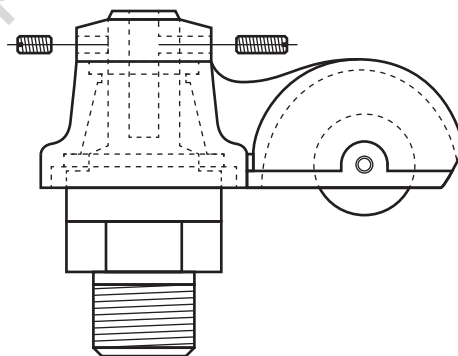


Truck Detail

Aluminum body
Stainless steel ball bearings
Aluminum sheave
Cast aluminum spindle

Each section matched marked A
for field assembly. Exposed A
portion of jam sleeve must A
be **well lubricated** prior to A
assembly.

1-1/2" maximum shop
gap allowed for field fitting
(ram for tight joint)



Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6		The Flagpole Company	Date:
Location:	Exposed height: 30'-0"	Overall height: 33'-0"	GGFA ET as AUE	Revision:
Architect:	Ships in 2 Sections	Butt diameter: 5"	O[[\'] ET A JHE	
Contractor:	Top diameter: 3"	Wall thickness: .125"	I et e B I G	
Customer:	Finish: 100 grit polish			Job: