



Model IC-408156

8" - 14 gauge spun aluminum ball  
gold anodized.

Single sheave truck, cast aluminum  
revolving, non-fouling, internal  
halyard truck

One length #6 wire center halyard,  
with 2 flag snaps and covers

One 2" x 3-1/2" vinyl covered  
counterweight with eyelet

Beaded retaining ring

Access opening with cylinder lock

Aluminum flash collar

3000 PSI concrete

Hardwood wedges  
(supplied by others)

Dry sand tightly tamped  
after aligning pole

Foundation sleeve -16 ga  
hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate

1/4" Steel support plate  
welded to grounding spike

Exposed height: 40'-0"

Tapered portion: 22'-9"

Overall length: 44'-0"

Access height: 5'-0"

Straight portion: 21'-3"

Foundation: 4'-6"


4'-0"

6"

12"

18"

48"

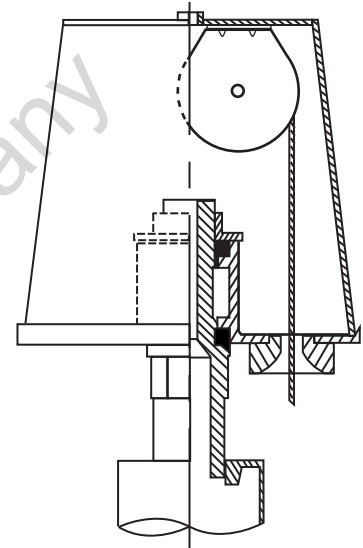

Revolving non-fouling internal halyard  
truck, cast aluminum body, 26  
stainless steel ball bearings,  
and 2-1/2" diameter plated  
steel sheave.

Cam-action cleat  
with sheave

Cylinder lock


Door for access  
opening

Access opening

All shafts with overall  
length of more than  
38'-6" are shipped in  
two sections.

**2 Sections.** Each section  
matched marked for field  
assembly. Exposed  
portion of jam sleeve must  
be **well lubricated** prior to  
assembly.

1-1/2" maximum shop  
gap allowed for field  
fitting (ram for tight joint)



Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	The Flagpole Company	Date:
Location:	Exposed height: 40'-0"	Overall height: 44'-0"	Revision:
Architect:	Ships in 2 Sections	Butt diameter: 8"	
Contractor:	Top diameter: 3-1/2"	Wall thickness: .156"	
Customer:	Finish: 100 grit polish		Job: