

Single sheave truck, cast aluminum revolving, non-fouling, internal halyard truck

1/8" x 7x19 Mil-C-5424 Stainless steel aircraft cable

Standard flag arrangement: 12' x 18'

Neoprene coated 2" diameter steel counterweight

Nylon beaded retainer ring

Gearless, self locking direct drive winch with six tumbler cylinder lock

Aluminum flash collar

3000 PSI concrete

Hardwood wedges (supplied by others)

Dry sand tightly tamped after aligning pole

Foundation sleeve -16 ga hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate


1/4" Steel support plate welded to grounding spike

**Model IW-6010250**




**THE FLAGPOLE COMPANY**

The Flagpole Professionals!

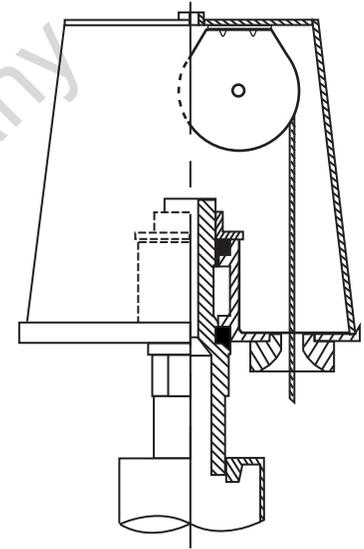

Revolving non-fouling internal halyard truck, cast aluminum body, 26 stainless steel ball bearings, and 2-1/2" diameter plated steel sheave.

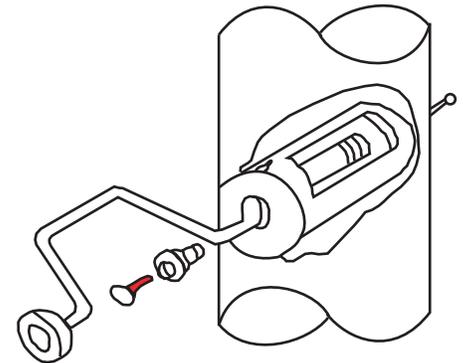


**Winch Detail**

All shafts with overall length of more than 38'-6" are shipped in two or three sections.

3 Sections. Each section matched marked for field assembly. Exposed portion of jam sleeve must be **well lubricated** prior to assembly.

1-1/2" maximum shop gap allowed for field fitting (ram for tight joint)



Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	The Flagpole Company	Date:
Location:	Exposed height: 60'-0" Overall height: 66'-0"	221 N. Main St.	Revision:
Architect:	Ship in 3 Sections Butt diameter: 10"	Brooklyn, MI 49230	
Contractor:	Top diameter: 4" Wall thickness: .250"	800.805.9728	
Customer:	Finish: 100 grit polish	The Flagpole Professionals!	Job: