
CLK800-50



Parts Available For These Popular Brands and Others

POLARIS

can-am



Kawasaki



HIGHLIFTER



sales@highlifter.com



800-699-0947 | 8:00am - 6:00pm CST



780 Professional Drive North, Shreveport, LA 71105



www.highlifter.com

Read before Installation

This product is designed for use on ATVs and/or RUVs to increase ground clearance and fender clearance. Purchasers should be aware that use of this product may increase the frequency of required maintenance, part wear, and will raise the center of gravity on your ATV and/or RUV, increasing risk of roll-over, injury and death on all types of terrain. It is your responsibility to always inform other operators and passengers of this vehicle about the added risks.

High Lifter Products, products are designed to best fit users ATV/RUV under stock conditions. Adding, modifying, or fabricating any OEM or aftermarket parts will void warranty. High Lifter Products, products could interfere with other aftermarket accessories. If the user has aftermarket products on machine, contact High Lifter Products to verify that they will work together. Adding aftermarket suspension components and/or more aggressive tires can cause breakage of other OEM driveline components such as differentials, axles or drive shafts.

We recommend that wider tires and/or wheel spacers be used to achieve a wider stance and to improve stability of the ATV and/or RUV. Riders should be advised that the handling characteristics of a taller ATV and/or RUV are different and require extra care when riding, particularly on side hills or off-camber situations. If you further raise the center of gravity by adding taller tires, heavy loads to racks or seats, or by any other means, the ATV and/or RUV must be operated with even more care, at slower speeds and on relatively flat ground. All turns should be done at a slow speed, even on level ground.

Operation of an ATV and/or RUV with or without modified suspension components, while or shortly after consuming alcohol or drugs, subjects the rider to the risk of serious bodily harm or possible death. This risk is compounded if the rider does not wear an approved helmet and other safety gear. High Lifter urges that all approved safety gear be worn when riding an ATV and/or RUV as a driver or passenger.


By purchasing and installing High Lifter Products, products, user agrees that should damages occur, High Lifter Products will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. High Lifter Products will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from High Lifter Products. The total liability of seller to user for all damages, losses, and causes of action, shall not exceed the total purchase price paid for the product that gives rise to the claim.

Dealers and other Installers

You are responsible for informing your customer and end user of the information contained above and the increased potential hazards of operating an ATV and/or RUV equipped with modified suspension components. If you install any suspension modifying components, it is your responsibility to also install the warning label prominently in view of the driver and in prominent view of the driver and passenger on RUVs and multi-passenger ATVs. They should also be instructed to notify anyone operating the vehicle, as well as any passengers, that said vehicle is modified.

As discussed above, it is critically important that they be instructed in the need for slower speed operation, regardless of terrain, after this lift kit is installed.

Parts Diagram

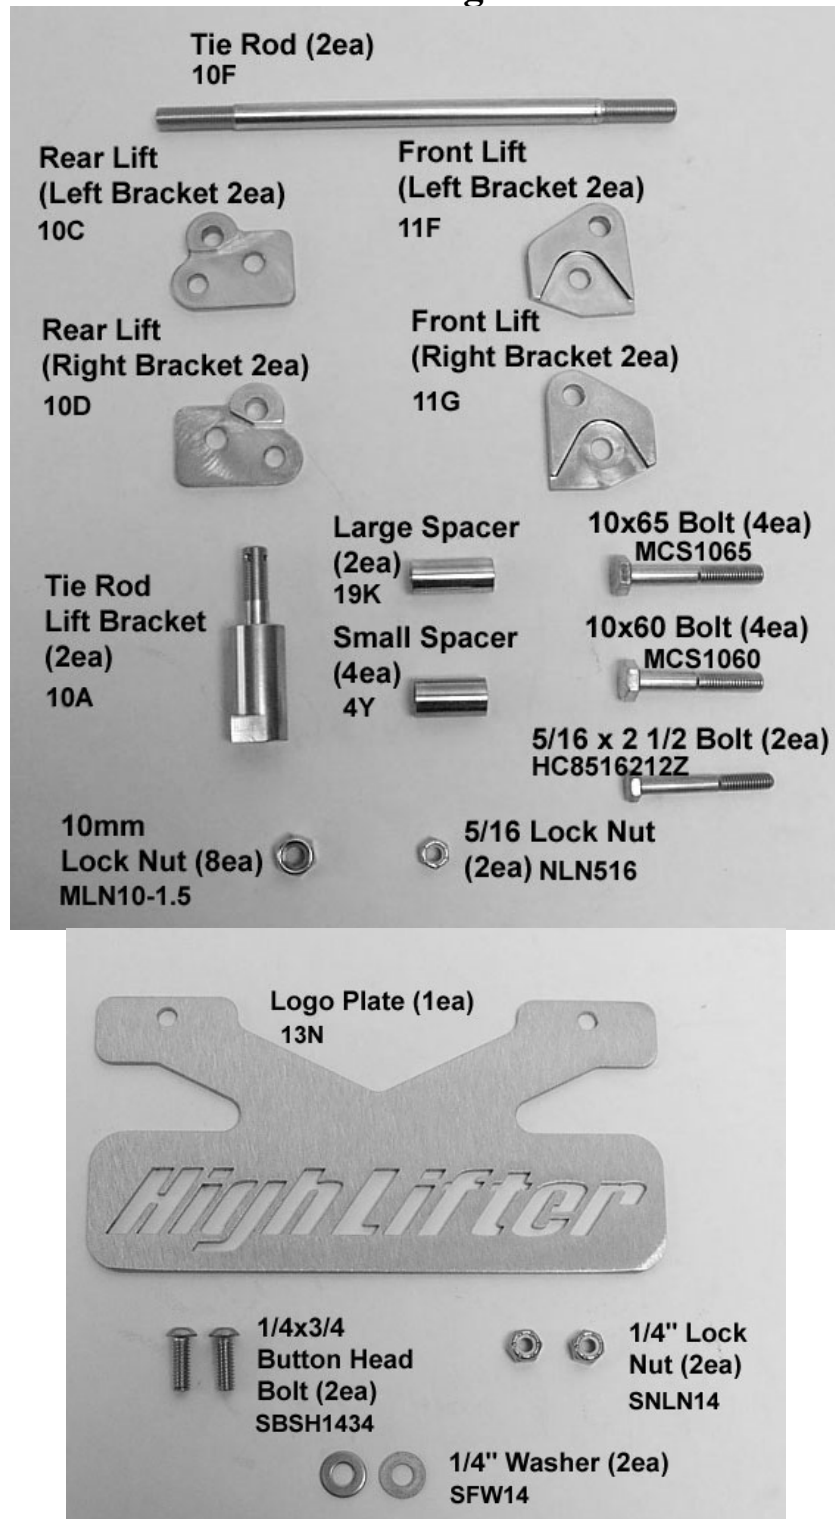


Note: Left and Right positions are from the seated position on the ATV.


NOTE: The logo bracket may look different from the picture shown

Front Lift Installation

- 1) Place ATV transmission in park. Place jack under center of ATV front end and lift until front wheels clear the ground. Be careful to support ATV properly so that it is securely supported so that A-arms and shocks can droop to full extension.
- 2) Remove front wheels.
- 3) Disconnect the bottom of the front shock from the control arm.
- 4) Remove the front tie rods from the ATV. **NOTE: You will reuse the tie rod ends and washers!**

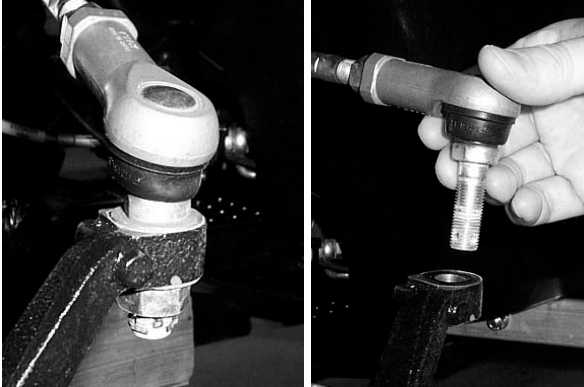


- 5) Connect the tie rod ends to the new tie rods. Make sure to notice the grooved end of the new tie rod. This end has the left handed threads. This will be connected to the tie rod end that is attached to the knuckle /hub assembly.
- 6) Next, connect the new tie rod lift brackets to the steering knuckle using the washers.

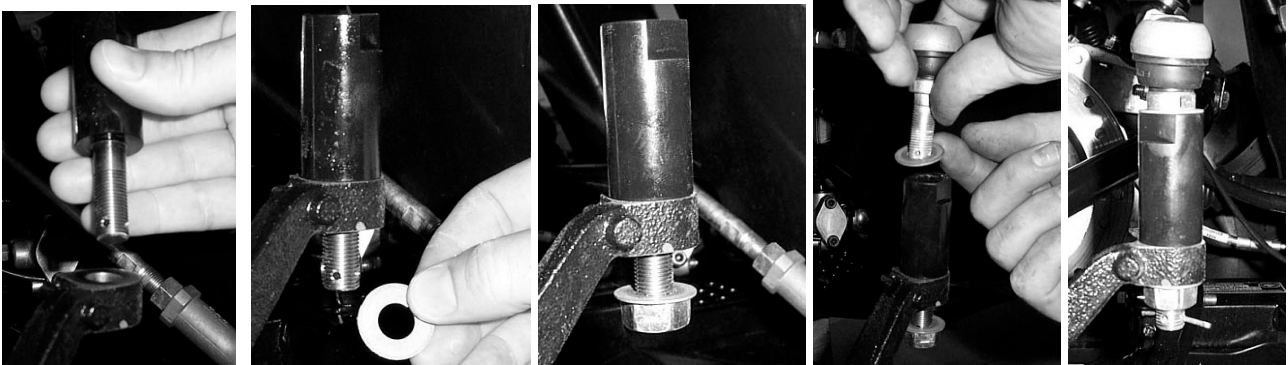


- 7) Disconnect the top of the shock from the ATV.




- 8) Insert the small spacer in the shock mount tab and place the Front Lift Brackets on either side of the shock mount tabs. Secure the brackets and spacer using 10 x 60mm hex bolt and 10mm lock nut.

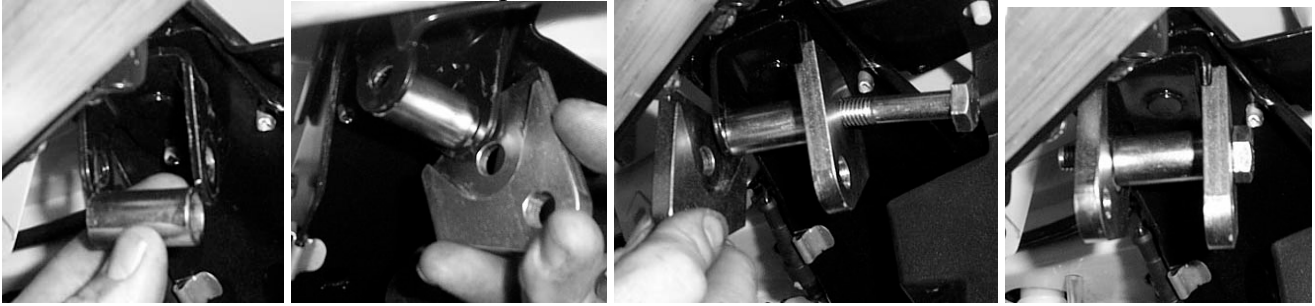

NOTE: If the brackets do not fit just right the Stock Shock Mount is Adjustable and can be moved. You may need to adjust it to make the brackets fit properly.

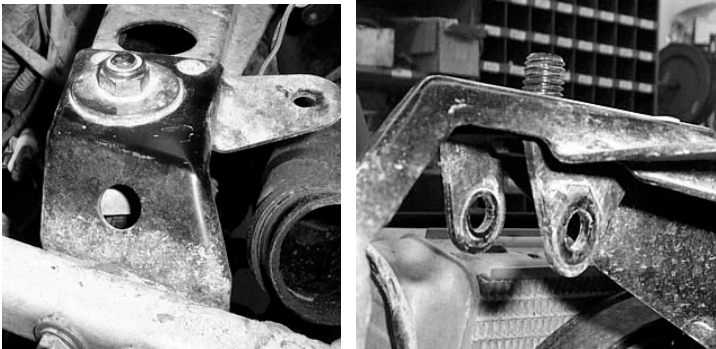

- 9) Connect the top of the shock to the lift brackets using the 10 x 60mm hex bolt and 10mm lock nut.

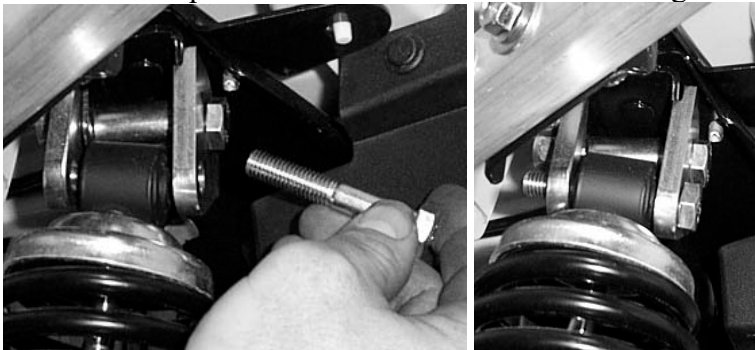

- 10) Repeat these steps for opposite side.
11) Make sure all lugs are torque to factory specifications.
12) Place wheels back onto ATV and lower jack.

Aligning the front wheels

1. Make sure that the handlebars are straight.
2. Take a tape measure and measure from a flat spot on the front and back ends of the tire.
3. They must both be the same distance. If they do not then you will need to adjust the tie rods in or out.

NOTE: A slight toe out makes the steering less sensitive and the ATV more stable. When adjusting the toe, be sure to take the time to adjust both ends half the required distance.


Rear Lift Installation

1. Place ATV transmission in park. Place jack under center of ATV rear end and lift until rear wheels clear the ground. Be careful to support ATV properly so that it is securely supported so that the suspension can droop to full extension.
2. Remove rear wheels.
3. Starting with the **LEFT** side remove top of the rear shock.



NOTE: VERY IMPORTANT WHEN DISCONNECTING THE SHOCK FROM THE FRAME DO NOT LET THE CONTROL ARM DROP SUDDENLY. THIS CAN CAUSE THE AXLE TO PULL OUT FROM THE DIFFERENTIAL.

4. Once you have disconnected the top of the shock from the frame, you will need to enlarge the bolt hole on the driver's (Left) side to accommodate the 5/16 x 2 ½ hex head bolt. Use a 5/16 drill bit to this.

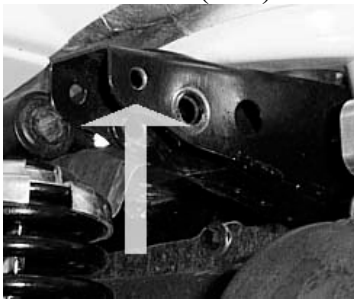

5. Insert one 10x 65mm hex bolt thru one of the right lift brackets, and then place the small rear spacer into the stock shock mount location. Insert the bolt thru the shock mount and spacer.


NOTE: When installing the lift kit on a Can-Am 800 XMR do not use the small rear spacer. Only use the Large Spacer in step 7.



6. Next, place one left lift bracket onto the bolt and fasten it with a 10mm lock nut.



7. Now, place the large spacer into the frame, between the two lift brackets, and connect them using the 5/16 x 2 1/5 hex bolt. Secure it using a 5/16 lock nut.

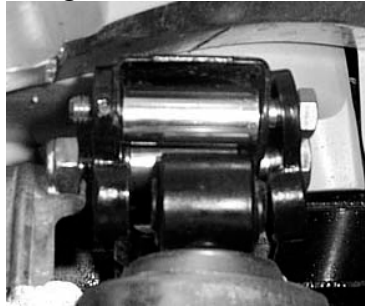


8. Connect the top of the shock between the two lift brackets using a 10x65 hex bolt and 10mm lock nut.




9. Repeat the steps for the right side. You will not need to enlarge the hole on the right.
10. Once you are complete place the wheels back on the ATV and torque all lugs to factory settings.

Badge Installation

1. Locate the stock mounting bracket.

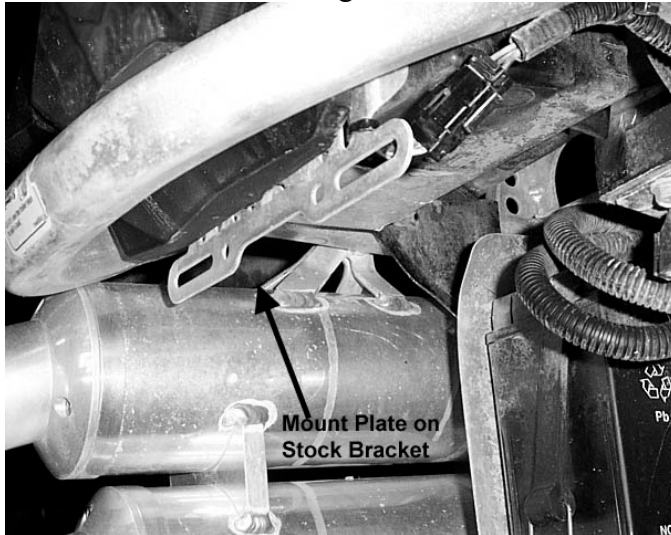

2. Mount the High Lifter Badge to the stock mounting bracket.
3. Use the $\frac{1}{4}$ " x $\frac{3}{4}$ " button head bolts, $\frac{1}{4}$ " washers, and $\frac{1}{4}$ " lock nuts provided.

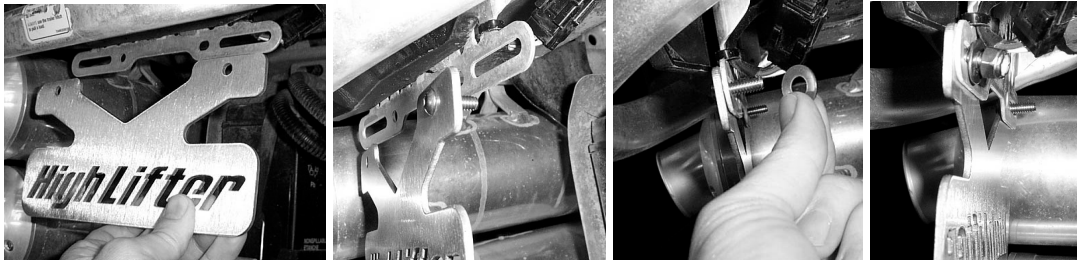



High Lifter Lifetime Warranty

From the beginning, High Lifter has engineered and manufactured some of the toughest, most durable products on the market. That's why this product comes with a Lifetime Warranty. It's our promise that High Lifter will never let you down.

- The **Lifetime Warranty** covers products sold to the original purchaser only and is not transferable. The term of the warranty is for the lifetime of the vehicle in question.
- Normal wear and tear items and finishes, such as, but not limited to: Heim joints, tie rod ends, ball joints, bearings, seals, bushings, bushing sleeves, zinc plating, powder coating, or chipping and discoloration of any finish is not covered.
- High Lifter will ship the replacement product after the returned product has been inspected by High Lifter staff.
- The warranty shall not include claims for damages, installation time or labor charges, economic losses, inconvenience, transportation, towing, down time, direct or indirect or consequential damages or delay resulting from any defect.
- The warranty does not apply to products that have been improperly applied or improperly installed.

Making a warranty claim

1. All claims must be accompanied by the part and the original sales receipt or other acceptable proof of purchase from the original owner.
2. All warranties must be accompanied with a Return Merchandise Authorization (RMA) number. (Contact High Lifter at 318-524-2270 or 800-699-0947 for an RMA number)
3. When shipping the damaged product:
 - a. Write the RMA number on the outside of the box.
 - b. Also include the RMA number, proof of purchase and any notes inside the box.
 - c. Please keep your tracking number and shipment information.
4. The customer is responsible for shipping the product to High Lifter--return shipping within the lower 48 states will be paid by High Lifter products. With all warranty claims, only standard shipping services apply.
5. High Lifter will process your order within 24 business hours of receiving the returned item.
6. **Ship to:** High Lifter Products, 780 Professional Drive North, Shreveport, Louisiana 71105