
## YUKON MAPLE

engineered





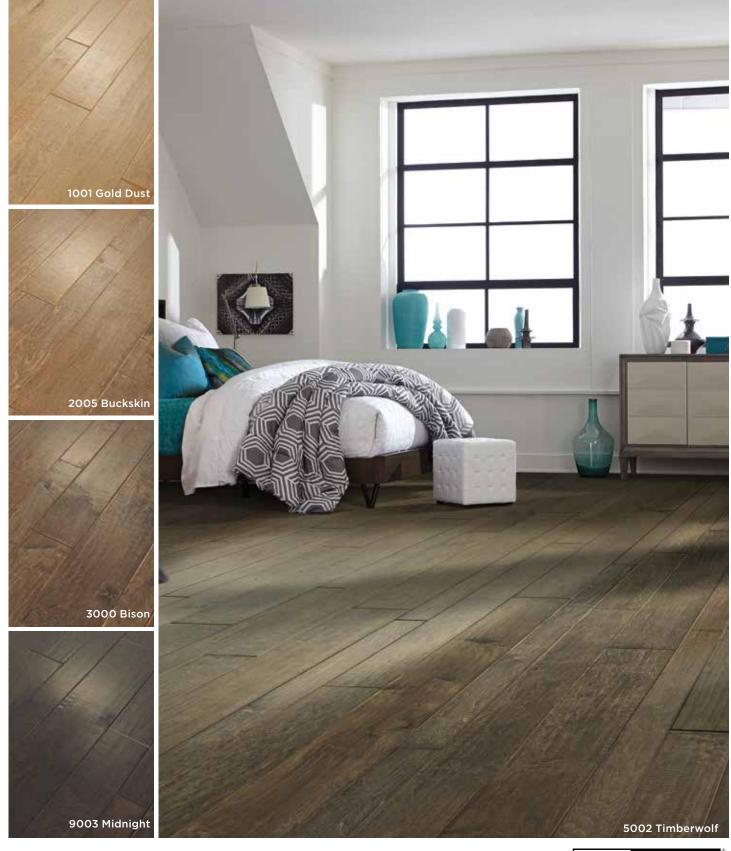

## YUKON MAPLE



**FLOORS** 

Style Number	SW547	SW548	SW549
Construction	Epic Plus	Epic Plus	Epic Plus
Thickness	Nominal 3/8"	Nominal 3/8"	Nominal 3/8"
Width	5″	6 <sup>3</sup> / <sub>8</sub> "	3¼", 5", 6¾" mixed - packaged together
Species	Maple	Maple	Maple
Texture	Heavy Scraped	Heavy Scraped	Heavy Scraped
Gloss Level	20%	20%	20%
Janka Hardness Rating	2233	2233	2233
Edge Description	Pillowed	Pillowed	Pillowed
End Description	Pillowed	Pillowed	Pillowed
SF per carton	23.66	30.48	34.69
SF per pallet	1,419.60	1,371.60	1,561.05
Installation	Nail, Staple, Glue, Float	Nail, Staple, Glue, Float	Nail, Staple, Glue, Float
All measurements are nominal		Cartons may include random lengths	

## Features

- · Combines maple's softly subtle wood grain with heavy scraping to create a relaxed setting
- Available in single widths (5" or 6<sup>3</sup>/<sub>8</sub>") or mixed width option

## **Sundry Recommendations**

Style #	Style Name	Coverage	Moisture Test	Additional Features		
ADHESIVES						
HS105	35MC — Urethane	35 SF / gal for moisture	No Moisture test required	Sound control & crack suppressant		
		60 SF / gal as adhesive	Up to 5 lbs. or 85% RH			
111SA	3-in-1 Ultra — MS	35 SF / gal for moisture	No Moisture test required	Sound control & crack suppressant		
		70 SF / gal as adhesive	Up to 5 lbs. or 85% RH			
HS304	DMC140 — Urethane	35 SF / gal for moisture	No Moisture test required			
SWADH	UreBond Plus	35 SF / gal for moisture	Up to 8 lbs. or 85% RH			
		60 SF / gal	Up to 5 lbs. or 85% RH			

**Trim Pieces** length: 78" (\*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are non-stocking — but are available through a quick-ship program. **Delivery should take approximately 2 to 3 weeks**.)





shawfloors.com **05.10.2017**