



unite

COVER | **COVE** 0927V in graze 27326 + jade 27405 + gesso 27520
installed monolithic

Demanding spaces can also be beautiful. Unite is a collection that brings together the look of refined wood and stone in neutral and bright shades. Loose lay or adhered to the floor, it combines a natural beauty and the utmost durability.



INLET LVT 0926V in spindle 26140 | installed ashlar + HONEST TILE 5T236 in mint 35327 | installed monolithic



COVE LVT 0927V in gesso 27520 | installed modified herringbone



INLET LVT 0926V in coarse 26595 + **COVE LVT** 0927V in color wash 27436 + sapphire 27486 + jade 27405 + graze 27326 | installed stagger



side by side.

Unite lvt has a 5mm construction that works seamlessly with carpet tiles for unique installations without the need for a transition strip.



Color and Visual Variations

Color and visual variation is inherent in all modular resilient products. It can vary slightly or significantly from piece to piece within a color. V1 has little or no variation from piece to piece. V4 will have a large variation in color and visual.

V1 uniform appearance



V2 slight variation



V3 moderate variation



V4 substantial variation



inlet 0926V installed brick



V3 shade 26506



V3 nestle 26120




V3 beech 26502



V3 refuge 26155



V3 thistle 26535

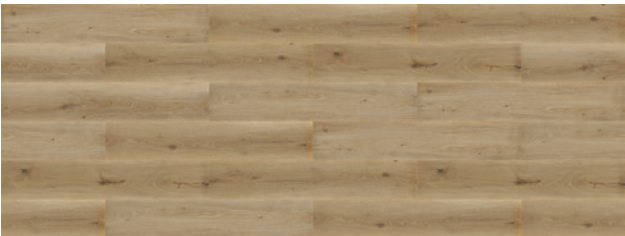


V2 spindle 26140



V3 coarse 26595



V3 thatch 26720

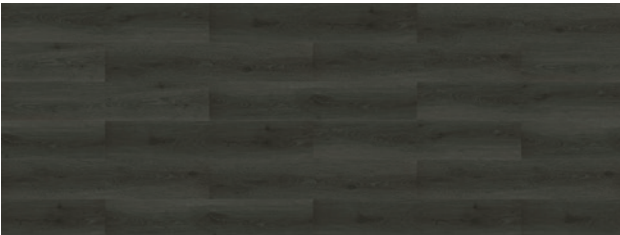

V2 raw 26549




V3 brew 26740

cove 0927V installed brick



V2 stoke 27855

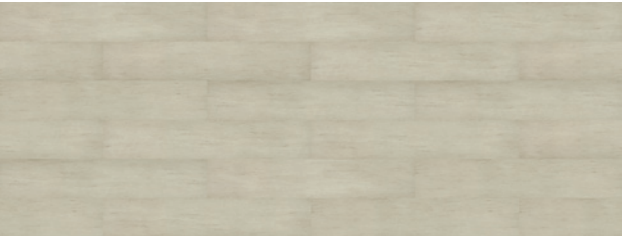

V2 plaster 27111




V2 lure 27201



V2 gesso 27520



V2 graze 27326

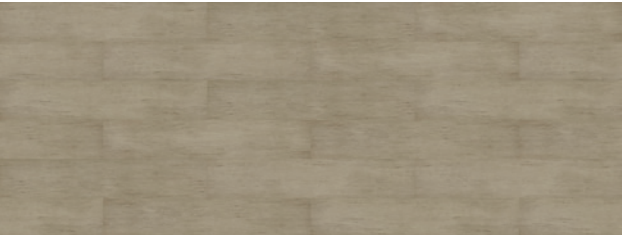

V2 silt 27504




V2 jade 27405



V2 caster 27518




V2 wash 27436

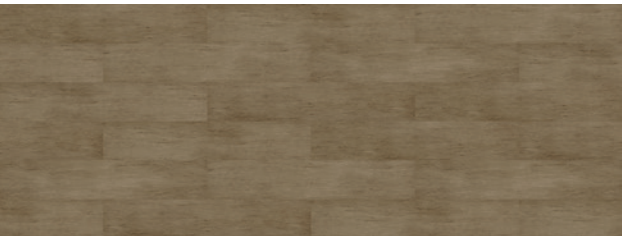

V2 pour 27530




V2 sapphire 27486

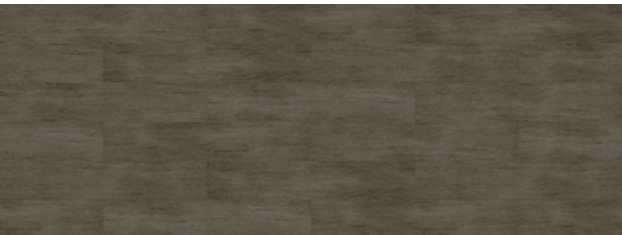

V2 cornerstone 27585

Layered durability

Inlet and Cove has a layered construction that is engineered for enhanced durability in high-demand environments. It features our maintenance friendly ExoGuard™ finish with more resistance to abrasion, staining, and improved cleanability. A dual purpose backing system allows these products to be installed as loose lay or direct glue.

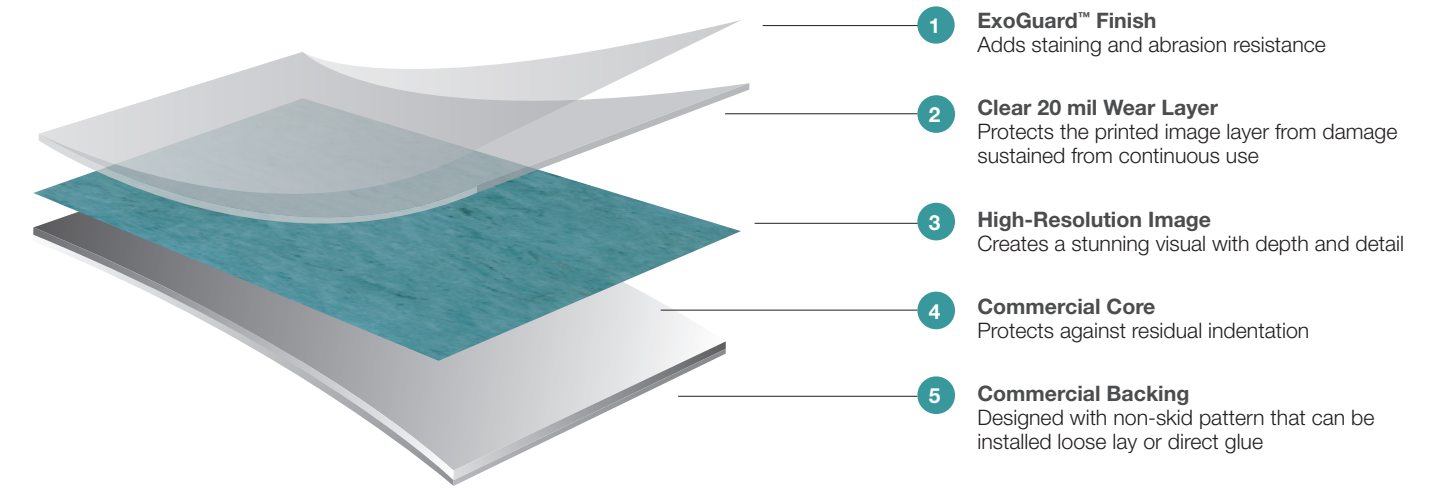

Loose Lay Optional
Cove and Inlet have a dual purpose backing construction allowing for loose lay or direct glue installation.

Durability in Demanding Environments
ExoGuard™ finish adds resistance to staining and abrasion.

No Transition Needed
5mm LVT can be installed next to most carpet tiles without the need for transition strips.

Polish-Optional Reduces Cost
ExoGuard™ is a polish optional finish that can reduce the cost of annual maintenance.

Static and Rolling Loads*
Cove and Inlet perform in environments with heavy static and rolling loads per ASTM test methods.

Improved Acoustics
Cove and Inlet 5mm LVT softens in-room foot fall and reduces floor-to-floor impact sound transfer.

Recommended Applications				
Ideal for Heavy Commercial Environments corporate education healthcare hospitality retail	Foot Traffic	Light	Moderate	Heavy
	Rolling*			
	Loads*			

* Reference installation guidelines to determine best installation method for your application.



Product Specifications

Construction	ASTM 1700, heavy performance luxury vinyl tile
Static Load Limit	Modified 1500 psi
Light Fastness	ASTM F1515 – passes, ensures the product will not discolor when exposed to light over time
Available Sizes	Width – 9 in 22.86 cm Length – 48 in 121.92 cm
Styles & Colors Available	Cove 0927V, 12 colors Inlet 0926V, 10 colors



Resources

Design. Deliver. Delight.	Go to shawcontract.com for a full range of product and design resources. For complete specifications, maintenance guidelines and warranty information for Inlet and Cove, visit the product page. Download photography, save your favorites and order samples.
Imagine. Explore. Create.	Get inspired using our award winning compose design tool . Customize flooring layouts to your specifications. Installation methods and color vizualization are at your fingertips.



Sustainability

Materials & Resources
MR – RFCI Industry Average EPD
IEQ – Floorscore® IAQ Certification

Low VOC Certified
Certified to rigorous indoor emissions requirements

Non-Ortho-Phthalate
Formulated without ortho-phthalates



Installation

Pattern Repeat	Inlet	Width – 46.26 in 1.18 m Length – 59.10 in 1.5 m
	Cove	Width – 97.80 in 1.1 m Length – 39.37 in 1 m
Warranty	10 year commercial warranty 10 year underbed when installed with Shaw 4100 and S150	
	Loose lay or direct glue	
Recommended Adhesives	Shaw 4100, S150	
Installation Methods	<div><div></div><div>monolithic</div><div></div><div>ashlar</div><div></div><div>stagger</div><div></div><div>brick</div><div></div><div>herringbone</div></div>	

**PASTE DOWN PAGE
INTENTIONALLY LEFT BLANK**