

# THE FLAGPOLE COMPANY®

The Flagpole Professionals!



## Model NSM-205125

5" - 14 gauge spun aluminum ball  
gold anodized

Single sheave truck, cast aluminum  
revolving, non-fouling type

2 Bronze swivel snaps with covers  
per halyard

3 Sets of halyard: #10 poly

6' - 0" Yardarm

3 - 9" Cast aluminum cleat

Aluminum flash collar

3000 PSI concrete

Hardwood wedges  
(supplied by others)



Dry sand tightly tamped  
after aligning pole

Foundation sleeve -16 ga  
hot dip galvanized steel

Steel centering wedges


1/4" Steel base plate

1/4" Steel support plate  
welded to grounding spike

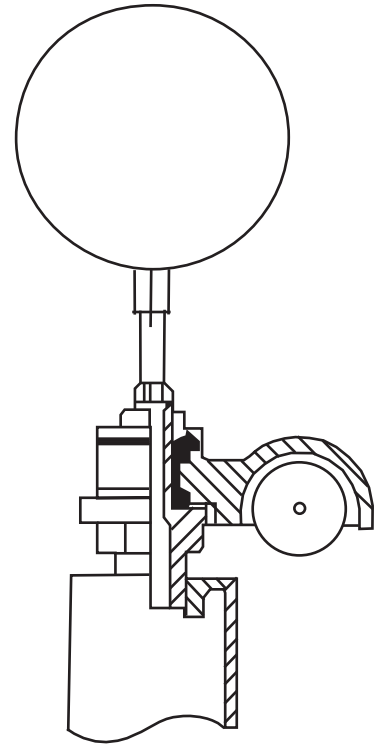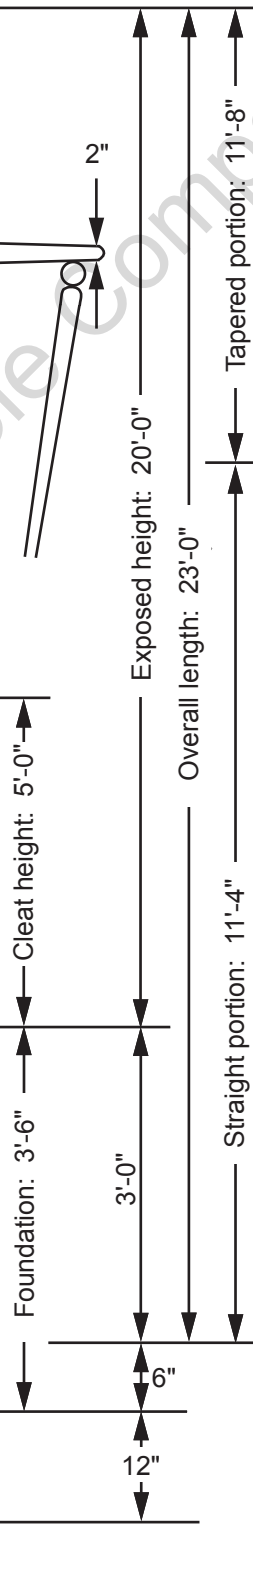

### Truck Detail

Aluminum body  
Stainless steel ball bearings  
Aluminum sheave  
Cast aluminum spindle

Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	The Flagpole Company	Date:
Location:	Exposed height: 20'-0" Overall height: 23'-0"	221 N. Main St.	Revision:
Architect:	Ships in 1 Section	Brooklyn, MI 49230	
Contractor:	Top diameter: 3" Wall thickness: .125"	800.805.9728	
Customer:	Finish: 100 grit polish		Job: